



More Precision

eddyNCDT // Inductive sensors based on eddy currents



Powerful eddy current measuring system for miniature sensors

eddyNCDT 3070

-  Wide range of applications with multiple sensor models
-  Extremely high temperature stability
-  High resolution and linearity
-  Frequency response 20 kHz (-3dB)
-  Measuring rate 200 kSa/s
-  Versions for ferromagnetic and non-ferromagnetic targets
-  Analog output (U/I)
digital output
-  Intuitive configuration via web interface



High performance for the industry

The eddyNCDT 3070 is a powerful, inductive sensor system based on eddy currents for measuring ranges smaller than 1 mm. The system comprises a compact controller, a sensor and an integrated cable and is factory-calibrated either for ferromagnetic or non-ferromagnetic materials.

Integration into plant and machinery

As sensor and controller are temperature-compensated, a high measurement accuracy can be achieved even in fluctuating temperatures. The sensors are designed for ambient temperatures up to a maximum of +200 °C and an ambient pressure up to 700 bar. The compact controller design as well as the sensor robustness make the measuring system ideal for integration into plant and machinery.

New benchmark in controller technology

The industrial-grade M12 Ethernet interface offers a modern fieldbus connection. Configurable analog outputs enable to output the measured values as voltage or current. For multi-system operation, the systems offer a new kind of frequency separation (LF/HF) which enables to operate several sensors next to one another without requiring any synchronization.


Features	Controller type	
	DT3070	DT3071
Active temperature compensation for sensor and controller	✓	✓
Frequency separation (LF & HF)	✓	✓
Ethernet interface	✓	✓
Intuitive web interface	✓	✓
Multipoint calibration regardless of the distance (up to 3-point calibration)	✓	✓
Scalable measuring range via analog output (teach function)	✓	✓
Scalable analog output	✓	✓
Switching and temperature outputs	-	✓
5-point calibration	-	✓
Storage of multiple characteristic curves	-	✓



When connecting a PC via the Ethernet interface, a modern web interface can be accessed without any further installation and enables the parameterization of sensor and controller. The DT3071 controller provides enhanced features such as 5-point calibration, setting of switching and temperature outputs, as well as storage of multiple characteristic curves.


Model		DT3070	DT3071
Resolution ^[1]	Static (20 Hz)	0.005 % FSO	
	Dynamic (20 kHz)	0.025 % FSO	
Frequency response (-3dB)		selectable (20 kHz, 5 kHz, 20 Hz)	
Measuring rate	Analog output	200 kSa/s (16 bit)	
	Digital interface	50 kSa/s (16 bit)	
Linearity ^[2]		< ±0.2 % FSO	< ±0.1 % FSO
Temperature stability ^[3]		< 0.05 % FSO / K	
Temperature compensation		+10 ... +50 °C	
Target material ^[4]		Steel, aluminum	
No. of characteristic curves		1	max. 4
Supply voltage		12 ... 32 VDC	
Power consumption		typ. 2.5 W (max. 2.8 W)	
Digital interface		Ethernet	Ethernet / selectable: switching output (TTL), temperature output (0...5 V)
Analog output		0 ... 10 V; 4 ... 20 mA (short circuit proof)	
Connection		Sensor: plug connector triaxial socket; supply/signal: 8-pole M12 connector; Ethernet: 5-pole M12 connector (cable see accessories)	
Mounting		Through bores	
Temperature range	Storage	-10 ... +70 °C	
	Operation	0 ... +50 °C	
Shock (DIN EN 60068-2-27)		15 g / 6 ms in 3 axes, 2 directions and 1000 shocks each	
Vibration (DIN EN 60068-2-6)		5 g / 10 ... 500 Hz in 3 axes, 2 directions and 10 cycles each	
Protection class (DIN EN 60529)		IP67 (plugged)	
Material		Aluminum die-cast	
Weight		approx. 230 g	

FSO = Full Scale Output
^[1] RMS noise relates to mid of measuring range
^[2] Value with 3-/5-point linearization
^[3] Values are referenced to the mid of the measuring range within the compensated temperature range
^[4] Steel: St37 steel DIN1.0037, aluminum: AlMg3

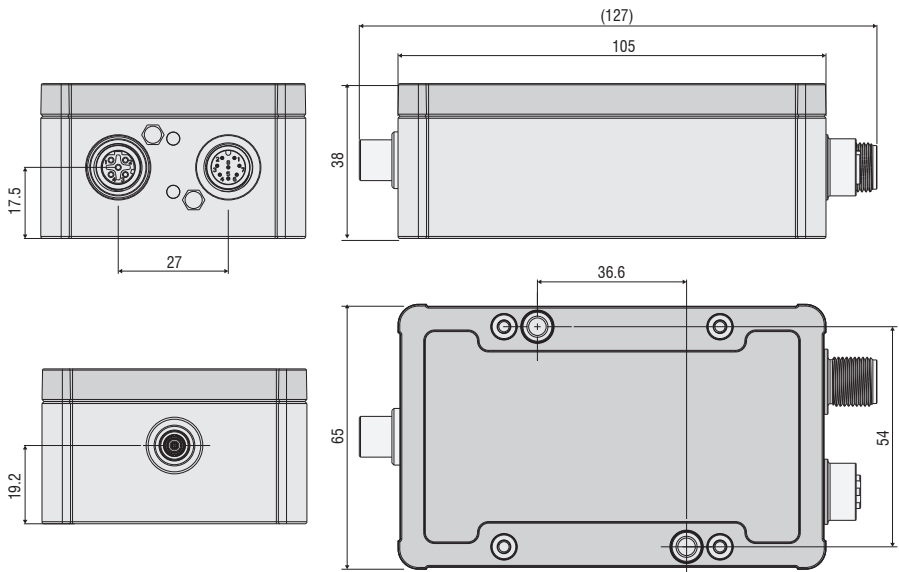

Pin assignment IN/OUT/24V IN

Pin	Assignment	Color (cable: PCx/8-M12)
1	Analog output U _{Displacement}	White
2	Supply +24 V	Brown
3	Limit value 1 / U _{Temp} sensor	Green
4	Limit value 2 / U _{Temp} controller	Yellow
5	GND Temperature, limit value	Gray
6	GND analog output	Pink
7	GND supply	Blue
8	Analog output I _{Displacement}	Red

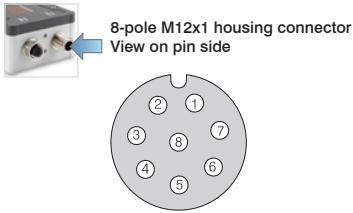


All dimensions in mm, not to scale

Standard sensors

eddyNCDT 3070

▲▲▲
Measurement direction

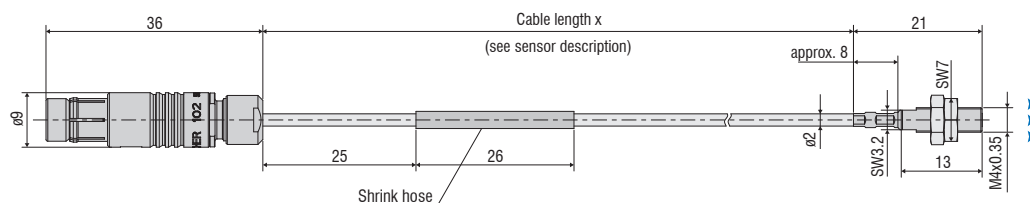

Model	ES-S04-C-CAx	
Measuring range	0.4 mm	
Start of measuring range	0.04 mm	
Resolution ^[1] ^[2] ^[3]	0.02 μ m	
Linearity ^[1] ^[4]	< ± 1 μ m	
Temperature stability ^[1] ^[2]	< 0.14 μ m / K	
Temperature compensation	+10 ... +180 °C	
Sensor type	shielded	
Min. target size (flat)	$\varnothing$ 5 mm	
Connection	integrated cable, axial, length 0.25 m, 0.5 m or 0.75 m ^[5] bending radius: static $\geq$ 10 mm, dynamic $\geq$ 20 mm	
Mounting	Screw connection (M4)	
Temperature range	Storage	-20 ... +180 °C
	Operation	-20 ... +180 °C
Pressure resistance	100 bar (front)	
Shock (DIN EN 60068-2-27)	30 g	
Vibration (DIN EN 60068-2-6)	15 g	
Protection class (DIN EN 60529)	IP50	
Material	Stainless steel and ceramic	
Weight	approx. 25 g	

^[1] Valid for operation with DT307x referenced to the nominal measuring range

^[2] Relates to the mid of the measuring range within the compensated temperature range

^[3] RMS value of the signal noise, static (20 Hz)



^[4] Only with DT307x controller and 3-/5-point linearization

^[5] Length tolerance cable: ± 0.03 m

Special sensors

eddyNCDT 3070

▲▲▲▲
Measurement direction

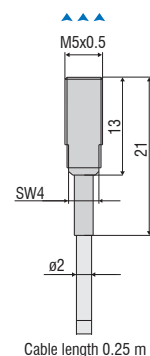

Model	EU05	ES08
Measuring range	0.5 mm	0.8 mm
Start of measuring range	0.05 mm	0.08 mm
Resolution ^{[1] [2] [3]}	0.025 μ m	0.04 μ m
Linearity ^{[1] [4]}	< $\pm 0.5 \mu$ m	< $\pm 0.8 \mu$ m
Temperature stability ^{[1] [2] [4]}	< 0.175 μ m / K	< 0.28 μ m / K
Temperature compensation ^[4]	0 ... +150 °C	0 ... +150 °C
Sensor type	unshielded	shielded
Min. target size (flat)	Ø 9 mm	Ø 7.5 mm
Connection	integrated cable, axial, length approx. 0.25 m ^[5]	integrated cable, axial, length approx. 0.25 m ^[5]
Mounting	Screw connection (M3)	Screw connection (M5)
Temperature range	Storage	-20 ... +150 °C
	Operation	0 ... +150 °C
Pressure resistance	-	20 bar (front)
Protection class (DIN EN 60529)	IP64 (plugged)	IP64 (plugged)
Material	Stainless steel and ceramic	Stainless steel and plastic

Operation with DT307x requires special calibration (LC)

^[1] Valid for operation with DT307x referenced to the nominal measuring range


^[2] Relates to the mid of the measuring range within the compensated temperature range

^[3] RMS value of the signal noise, static (20 Hz)

^[4] Only with DT307x controller and 3-point or 5-point linearization

^[5] Length tolerance cable: ± 10 %


Dimensions cable sockets ES05 and ES08

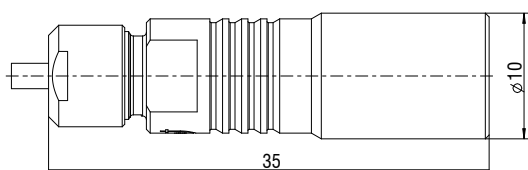

All dimensions in mm, not to scale


Special sensors

eddyNCDT 3070

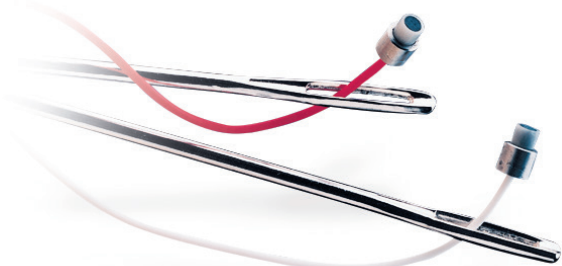

Subminiature sensors for restricted spaces


As well as standard sensors in conventional designs, miniature sensors with the smallest possible dimensions that achieve high precision measurement results are also available. Pressure-resistant versions, screened housings, ceramic types and other special features characterize these sensors, which achieve highly accurate measurement results despite their small dimensions. These miniature sensors are primarily used in high pressure applications, for example, in combustion engines.



ES04/180(25) Shielded sensor

Measuring range 0.4 mm
 Temperature stability: $\leq \pm 0.035\%$ FSO/°C
 Connection: integrated coaxial cable, 1 m ($\varnothing$ 0.5 mm), short silicone tube at the cable outlet
 Pressure resistance (static): front side 100 bar
 Max. operating temperature: 180 °C
 Housing material: stainless steel


2:1



ES04/180(102) Shielded miniature sensor

Measuring range 0.4 mm
 Temperature stability: $\leq \pm 0.035\%$ FSO/°C
 Connection: integrated coaxial cable 0.8 m ($\varnothing$ 0.5 mm) with adapter PCB
 Pressure resistance (static): front side 100 bar / rear side splash water
 Max. operating temperature: 150 °C
 Housing material: stainless steel and ceramic
 Connection cable: ECx/1, length $\leq$ 6 m

3:1

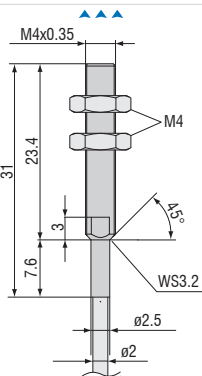


ES04(34) Shielded sensor

Measuring range 0.4 mm
 Temperature stability: $\leq \pm 0.035\%$ FSO/°C
 Connection: integrated coaxial cable 0.25 m ($\varnothing$ 2 mm) with protected triaxial socket
 Pressure resistance (static): front side 100 bar / rear side splash water
 Max. operating temperature: 150 °C
 Housing material: stainless steel and ceramic

1:1

cable length 0.25 m $\pm$ 0.04 m

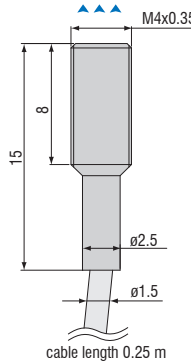


ES04(35) Shielded sensor

Measuring range 0.4 mm
 Temperature stability: $\leq \pm 0.035\%$ FSO/°C
 Connection: integrated coaxial cable 0.25 m ($\varnothing$ 1.5 mm) with protected triaxial socket
 Pressure resistance (static): front side 100 bar / rear side 5 bar
 Max. operating temperature: 150 °C
 Housing material: stainless and ceramic

2:1

cable length 0.25 m

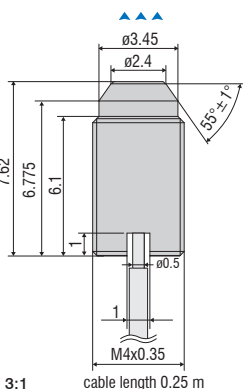


ES04(70) Shielded sensor

Measuring range 0.4 mm
 Temperature stability: $\leq \pm 0.035\%$ FSO/°C
 Connection: integrated coaxial cable 0.25 m ($\varnothing$ 0.5 mm) with adapter PCB
 Pressure resistance (static): front side 100 bar / rear side splash water
 Max. operating temperature: 150 °C
 Housing material: stainless and ceramic

3:1

cable length 0.25 m




ES05/180(16) Shielded sensor

Measuring range 0.5 mm
 Temperature stability: $\leq \pm 0.035\%$ FSO/°C
 Connection: integrated coaxial cable 0.25 m ($\varnothing$ 0.5 mm) with adapter PCB
 Max. operating temperature: 180 °C
 Housing material: stainless steel and epoxy

3:1

cable length 0.25 m

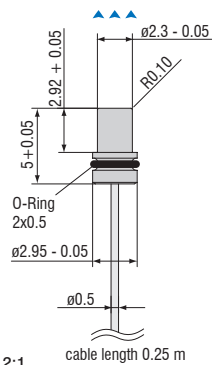

EU05(65) Unshielded sensor


Measuring range 0.5 mm

Connection: integrated coaxial cable
0.25 m ($\varnothing$ 0.5 mm) with adapter PCB

Pressure resistance (static):
front side 700 bar / rear side splash water

Max. operating temperature: 150 °C

Housing material: ceramic



EU05(93) Unshielded sensor

Measuring range 0.4 mm


Temperature stability: $\leq \pm 0.035\%$ FSO/°C

Connection: integrated coaxial cable
0.25 m ($\varnothing$ 0.5 mm) with adapter PCB

Pressure resistance (static):
front side 2000 bar / rear side splash water

Max. operating temperature: 150 °C

Housing material: ceramic



EU05(66) Unshielded sensor

Measuring range 0.5 mm


Temperature stability: $\leq \pm 0.035\%$ FSO/°C

Connection: integrated coaxial cable
0.25 m ($\varnothing$ 0.5 mm) with adapter PCB

Pressure resistance (static):
front side 400 bar / rear side splash water

Max. operating temperature: 150 °C

Housing material: ceramic



EU05(72) Unshielded sensor

Measuring range 0.4 mm


Temperature stability: $\leq \pm 0.035\%$ FSO/°C

Connection: integrated coaxial cable
0.25 m ($\varnothing$ 0.5 mm) with adapter PCB

Pressure resistance (static):
front side 2000 bar / rear side splash water

Max. operating temperature: 150 °C

Housing material: ceramic



EU1FL Unshielded flat sensor

Measuring range 1 mm

Temperature stability: $\leq \pm 0.025\%$ FSO/°C


Connection: integrated coaxial cable
0.25 m ($\varnothing$ 2 mm) with protected triaxial socket

Max. operating temperature: 150 °C

Housing material:
stainless steel and epoxy molding

Connection possibilities

eddyNCDT 3070

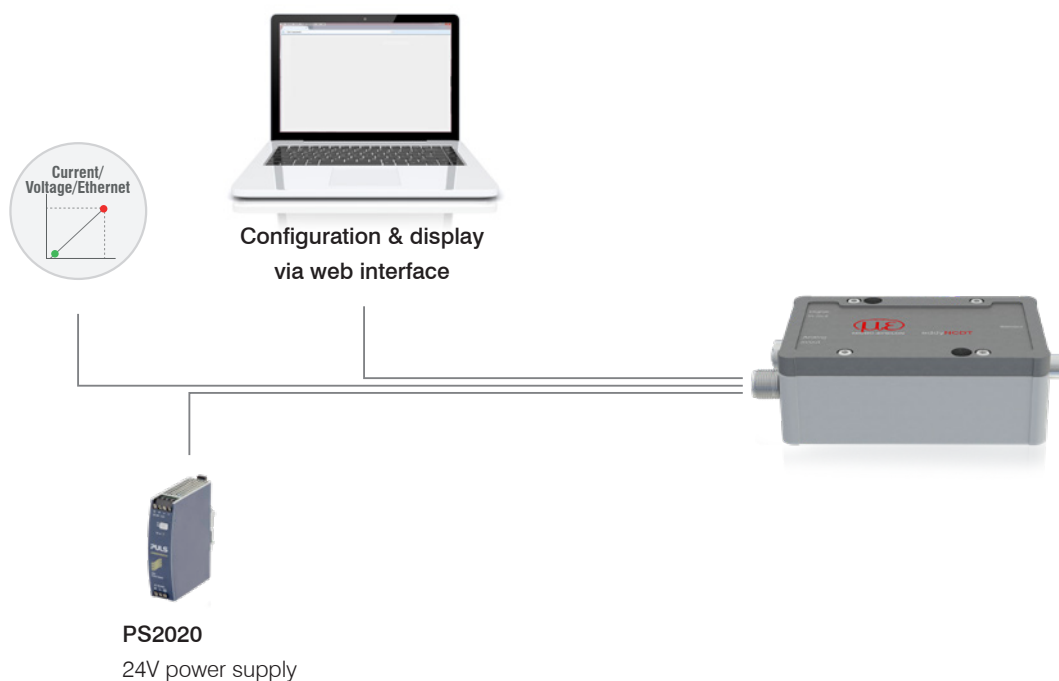

Plug/Socket

1 Plug Triax 0323118:

Type S 102 A014-120 D4,1
Triaxial plug: type bB0
Connection: push-pull
Temperature resistance: 200 °C



2 Socket Triax 0323141:

Type KE102 A014-120 D4,1
Triaxial socket: type fB0
Connection: push-pull
Temperature resistance: 200 °C



3 Plug Triax 0323727:

Type S 102 A014-120 D2,1
Triaxial plug: Type: mB0
Connection: push-pull
Temperature resistance: 200 °C




4 Plug Triax 0323174:

Type S101 A005-120 D4,1
Triaxial plug: type mA0
Connection: push-pull
Temperature resistance: 150 °C



5 Socket Triax 0323173

Triaxial socket: type fA0
Connection: push-pull
Temperature resistance: 150 °C



3 Socket Triax 0323121:

Type KE102 A014-120 D2,1
Triaxial socket: type fB0
Connection: push-pull
Temperature resistance: 130 °C



Sensors with socket: cable type EC-x/mB0/mB0



Coaxial cable with Viton sheath	
Cable diameter:	3.6 mm
Minimum bending radius:	static approx. 27 mm / dynamic approx. 54 mm
Temperature resistance:	up to 200 °C
Available lengths:	1 m / 3 m (6 m on request)

Sensors with integrated cable: ES-S04-C-CAx/mB0/D2,0
and extension cable: ECE-x/fB0/mB0/D3,6



	Coaxial cable (extension cable)	Coaxial cable (sensor cable)
Cable diameter	3.6 mm	2 mm
Minimum bending radius	static approx. 27 mm / dynamic approx. 54 mm	static approx. 10 mm / dynamic approx. 20 mm
Temperature resistance	up to 200 °C	static up to 200 °C
Available lengths	1 m / 3 m (6 m on request)	0.25 m / 0.5 m / 0.75 m

Sensors with integrated cable and open ends
for solder connection via adapter cable: ECA-x/OE/mB0/D3,6



Coaxial cable with Viton sheath	
Cable diameter:	3.6 mm
Minimum bending radius:	static approx. 27 mm / dynamic approx. 54 mm
Temperature resistance:	up to 200 °C
Available lengths:	1 m / 3 m (6 m on request)

Sensors with integrated cable and A0 plug via
adapter cable: ECA-x/mA0/mB0/D3,6



Coaxial cable with Viton sheath	
Cable diameter:	3.6 mm
Minimum bending radius:	static approx. 27 mm / dynamic approx. 54 mm
Temperature resistance:	up to 200 °C
Available lengths:	1 m / 3 m (6 m on request)

Item	Description	DT3001	DT3005	DT3020	DT3060	DT3070	DZ140	SGS
PCx/5-M12	Power supply and signal cable 5-pole with M12 connector Standard length: 5 m Optionally available: 10 m/20 m/40 m/80 m as drag-chain suitable variant	x	x					
PCx/8-M12	Power supply and signal cable 8-pole with M12 connector Standard length: 3 m Optionally available: 5 m/ 10 m / 15 m / 10 m also as drag-chain suitable variant			x	x	x		
PC5/8-M12/105	Power supply and signal cable Increased temperature resistance up to 105 °C 8-pole with M12 connector Length: 5 m as drag-chain suitable variant			x	x	x		
PC4701-x	Power supply and signal cable 8-pole with M12 connector Standard length: 10 m Optionally available: 15 m 10 m also available as drag chain-suitable variant							x
SCD2/4/RJ45	Ethernet cable 4-pole with M12 connector on RJ45 connector Standard length: 2 m				x	x		
PC140-x	Power supply and signal cable 8-pole connector Standard length: 3 m Optionally available: 6 m						x	
PS2020	Power supply unit Input 100-240 VAC Output 24 VDC / 2.5 A; installation on symmetrical standard rail 35 mm x 7.5 mm, DIN 50022	x	x	x	x	x	x	x
IF2035	Interface module for Industrial Ethernet connection Connection of RS422 or RS485 interfaces to PROFINET / Ethernet/IP / EtherCAT 2 network connections for different network topologies Ideal for confined spaces due to a compact housing and DIN rail mounting		x	x				
IF1032	Interface module for Ethernet/EtherCAT connection 1x RS485 2x analog-in (14 bit, max. 4 ksps), voltage 1x analog-in, (14 bit, max. 4 ksps), current		x	x				
IF7001	Single-channel converter cable from RS485 to USB Conversion from RS485 to USB Easy sensor connection via USB Integration into plant and machinery		x	x				

Plug system for vacuum applications

Vacuum feedthrough eddy/fB0/fB0/triax


The eddyNCDT series delivers high-precision measurement results even in airless rooms. The eddy/fB0/fB0/triax vacuum feedthrough also enables eddyNCDT products to be used in vacuum applications.

- Application in vacuums
- Application as a wall duct
- Pluggable version
- Compatible with all common eddyNCDT products



Vacuum feedthrough eddy/fB0/fB0/triax	
Housing material	CuZn39Pb3
O-ring material	FPM (Viton®)
Max. leakage rate (IEC standard 60068-2-17)	$<10^{-8}$ mbar·l/s
Operating temperature ^[1]	from -20 °C to 150 °C
Mating cycles (IEC 60512-5-9a)	10,000
Vibration (MIL-STD-202 Method 204 Condition B)	10 to 2,000 Hz, 1.5 mm or 15 g, 12 pass cycles per axis, 20 minutes per 10-2000-10 Hz pass cycle, no discontinuity $>1 \mu\text{s}$
Insulation resistance	$10^{10} \Omega$


^[1] Min. connection temperature: 0 °C

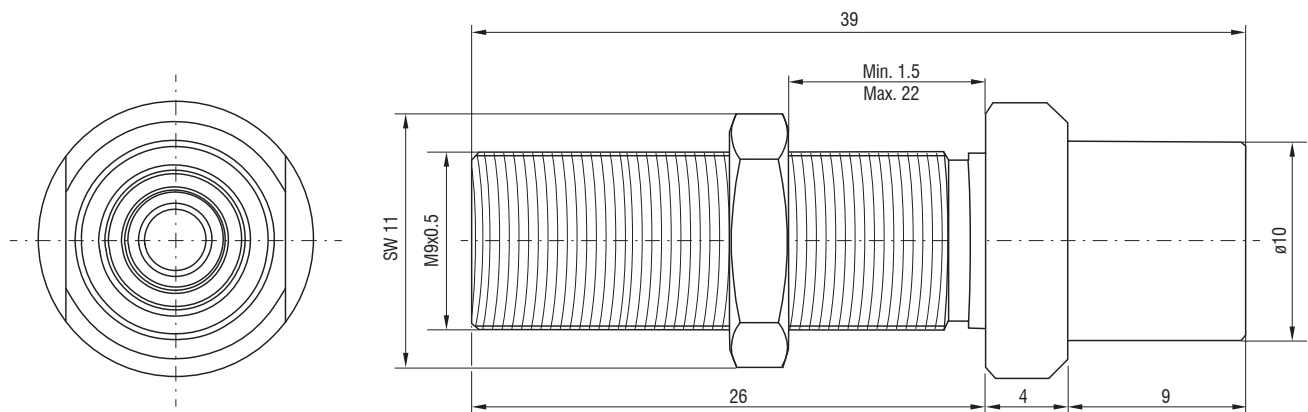

Standard installation situation

Distance between the nut and the measuring area

eddyNCDT sensors are mounted using the two mounting nuts included in the delivery. During the factory-calibration of the sensors, these were mounted in a defined distance A and included in the calibration. In order to achieve maximum linearity, the nut must be mounted in the defined distance indicated in the table.

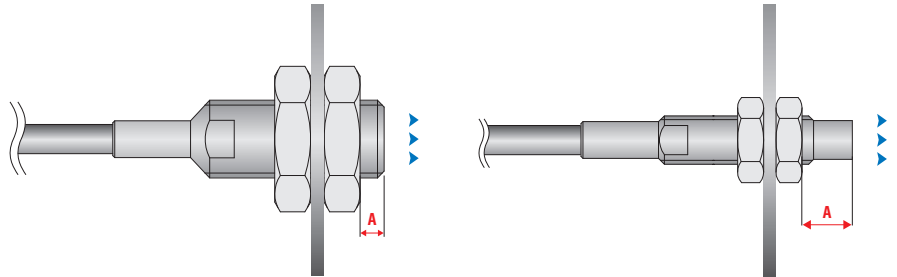

Please note the respective distances recommended in the table below when mounting the sensors:

Series	Model	Distance A
DT3001-	U2-A-SA	22 mm (± 0.2 mm)
	U2-M-SA	22 mm (± 0.2 mm)
	U4-A-SA	22 mm (± 0.2 mm)
	U4-M-SA	22 mm (± 0.2 mm)
	U4-A-Cx	22 mm (± 0.2 mm)
	U4-M-Cx	22 mm (± 0.2 mm)
	U6-A-SA	22 mm (± 0.2 mm)
	U6-M-SA	22 mm (± 0.2 mm)
	U8-A-SA	22 mm (± 0.2 mm)
	U8-M-SA	22 mm (± 0.2 mm)
DT3005-	U1-A-C1	8 mm (± 0.2 mm)
	U1-M-C1	8 mm (± 0.2 mm)
	S2-A-C1	4 mm (± 0.2 mm)
	S2-M-C1	4 mm (± 0.2 mm)
	U3-A-C1	10 mm (± 0.2 mm)
	U3-M-C1	10 mm (± 0.2 mm)
	U6-A-C1	13 mm (± 0.2 mm)
	U6-M-C1	13 mm (± 0.2 mm)
DT3020 / DT3060	ES-U1	8 mm (± 0.2 mm)
	ES-S1	4 mm (± 0.2 mm)
	ES-U2	8 mm (± 0.2 mm)
	ES-S2	4 mm (± 0.2 mm)
	ES-U3	10 mm (± 0.2 mm)
	ES-S4	4 mm (± 0.2 mm)
	ES-U6	20.4 mm (± 0.2 mm)
	ES-U8	24.6 mm (± 0.2 mm)
	ES04	2.1 mm (± 0.2 mm)
	EU05	5.5 mm (± 0.2 mm)
	ES08	2.7 mm (± 0.2 mm)
	ES1	4 mm (± 0.2 mm)
	EU1	6.7 mm (± 0.2 mm)
	ES2	4 mm (± 0.2 mm)
	EU3	10 mm (± 0.2 mm)
	ES4	4 mm (± 0.2 mm)
	EU6	10.125 mm (± 0.2 mm)
	EU8	12.8 mm (± 0.2 mm)
DT3070-	ES-S04	2.4 mm (± 0.2 mm)


Influences on the measurement signal

Sensor installation

The notes mentioned under "Standard installation situation" for correct sensor installation affect the measurement signal.

Minimum diameter of the target (flat)

The relative size of the target has effects on the linearity deviation. Ideally, the target size with shielded sensors is at least 2 times the sensor diameter, with unshielded sensors it is 4 times the sensor diameter. From this size on, almost all field lines run from the sensor to the target. Here, nearly any field line penetrates the target via the front surface and therefore contributing to the formation of eddy currents. With smaller target diameters, field linearization is recommended.

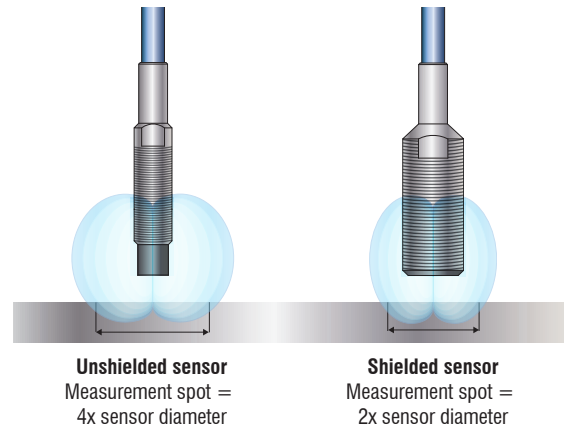

- ✓ $\varnothing$ Target = 4x or 2x sensor diameter
recommended (no linearization is required)
- F $\varnothing$ Target = 3x or 1.5x sensor diameter
requires field linearization (DT306x / DT3300)




Minimum diameter of round targets

As well as the minimum size for flat geometries, a minimum diameter for round measuring objects is required.

- F Diameter > 10x sensor diameter
requires field linearization (DT306x / DT3300)
- W Diameter < 10x sensor diameter
requires factory calibration

Compensating the distance with curved measuring objects


When measuring on curved surfaces such as shafts, the sensors use the medium distance which results from the closest and the most distant field line range. However, this is not the distance between the vertex of the curved target and the sensor. For this reason, eddy current measuring systems from Micro-Epsilon enable the storage of the actual distance in the controller. This is how measurements can be performed on cylindrical objects such as rolls or shafts.

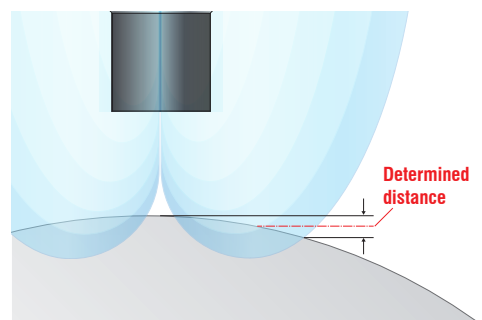

Material and thickness of the target

Stable measurement results require a certain target minimum thickness that depends on the target material used. For one-sided distance measurements, the following standard values are recommended:

Target material	Recommended target thickness
Aluminum	0.504 mm
Lead	1.377 mm
Gold	0.447 mm
Graphite	8.100 mm
Copper	0.402 mm
Magnesium	0.627 mm
Brass	0.747 mm
Nickel	0.081 mm
Permalloy	0.012 mm
Phosphor Bronze	0.906 mm
Silver	0.390 mm
Steel DIN 1.1141	0.069 mm
Steel DIN 1.4005	0.165 mm
Steel DIN 1.4301	2.544 mm

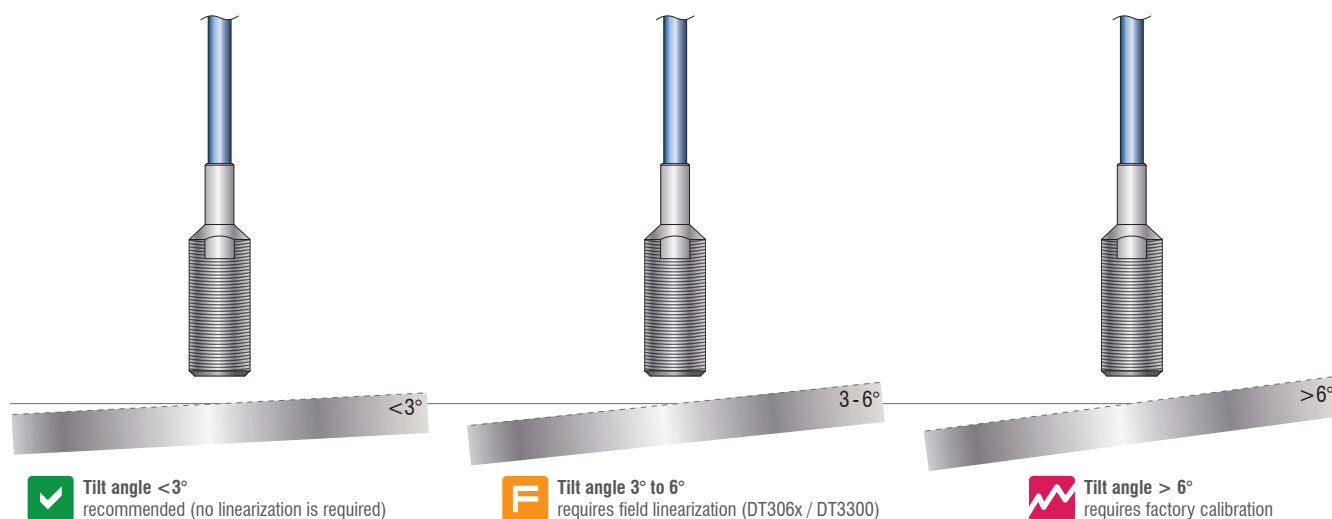


Tilt angle

The high accuracy of the eddyNCDT sensors is only achieved with vertical sensor installation. When the sensor or the target are tilted, the measured results slightly deviate from those measured in the vertical position.


The extent of deviation differs from sensor to sensor. The tilt angle of $\pm 3^\circ$ can be neglected for most of the measurement tasks. With a tilt angle of larger than 6° , factory calibration is recommended. With a 3-point calibration, the tilt angle can be stored in the controller. This compensates for all influences affecting the signal.

Frequency separation

For the simultaneous operation of several eddyNCDT measuring systems, these are available with a new type of frequency separation (LF/HF). The frequency separation enables multi-channel operation without mutual influence. This function makes a synchronization cable superfluous.

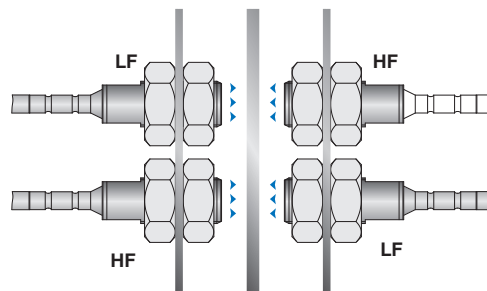


Field calibration

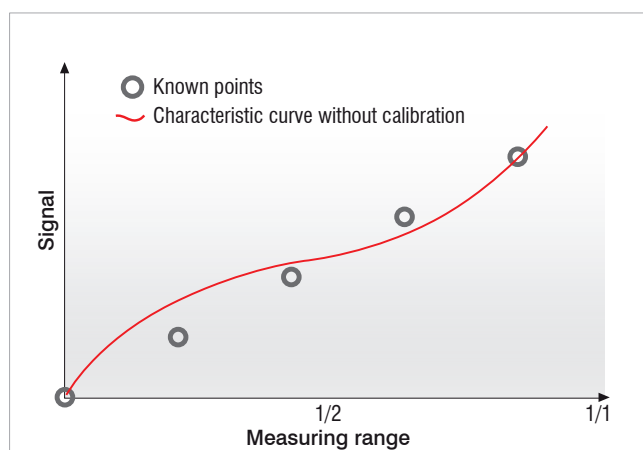


If the installation situation does not correspond to the standard installation conditions, field linearization is recommended (available with eddyNCDT 3060 and eddyNCDT 3300). This on-site calibration compensates for influences which result from the installation scenario or the target materials and shapes. Therefore, optimum measurement accuracies will always be achieved even in the case of difficult installation conditions.

For machine integration, linearization with 2 fixed points (start and end point) is sufficient in most cases. Using 3 or 5 points for linearization enables to increase the accuracy again.

For a linearization with 2 or more points, this applies only within the selected edge points. Outside this range, there may be larger linearity deviations.

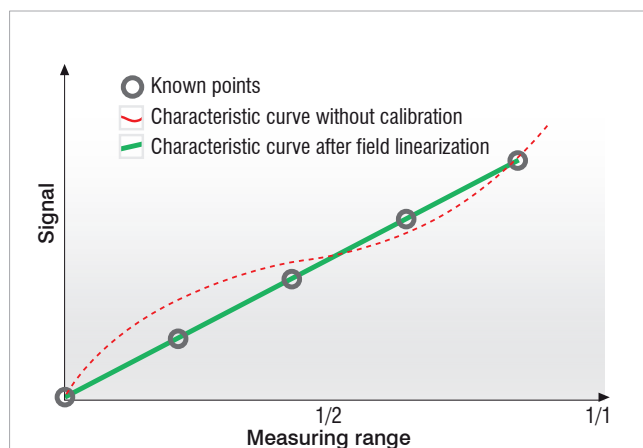

Thermal drift of a Micro-Epsilon eddy current system compared with the competitors

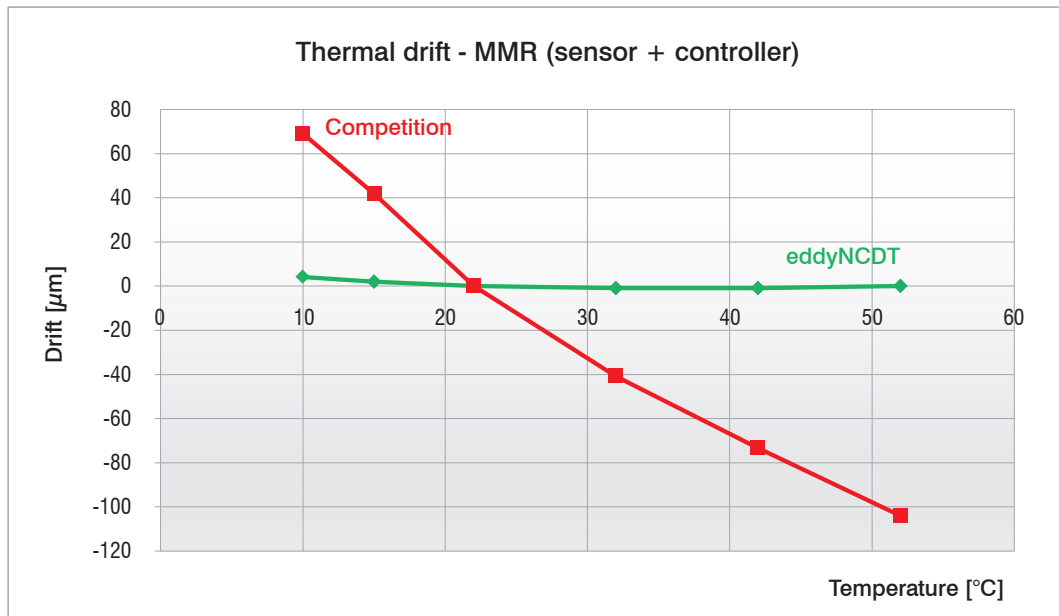

All eddyNCDT sensors and controllers are actively temperature-compensated (sensors up to max. 180 °C, controllers up to max. 50 °C). This means that the temperatures of the sensor and the controller are recorded during operation and considered in the measurement result. This results in an extremely stable measurement signal.

The figure shows a Micro-Epsilon sensor (green) compared with competing products (red). The maximum deviation over the entire temperature range is significantly below the 150 ppm/°C specified in the data sheet. Occasionally the deviation for the temperature increase of one degree amounts to a maximum of 150 ppm.

Conclusion: In order to keep precise measurement values in the μm range constant and reliable, the resolution to be achieved and the temperature influence are crucial factors. The temperature stability of the Micro-Epsilon system achieves such a high level that temperature fluctuations are actively compensated for. Due to the higher temperature influence of the competitor system, even daily temperature fluctuations of ± 2.5 °C can cause a deviation of > 20 μm. Measurements with micrometer accuracy are therefore not possible with the competitor system without active temperature compensation, even in normal environments.

Sensors and Systems from Micro-Epsilon



Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement




Measuring and inspection systems for metal strips, plastics and rubber



Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers

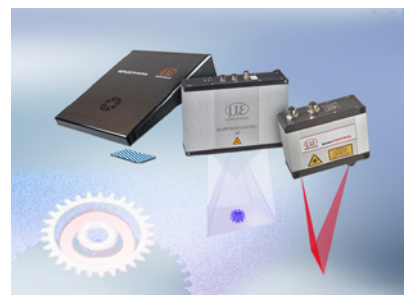

3D measurement technology for dimensional testing and surface inspection