



More Precision

optoNCDT // Laser displacement sensors (triangulation)



Smart laser sensors for precise measurements optoNCDT 1900

designed for advanced
AUTOMATION

-  For common surfaces
-  Measuring rate up to 10 kHz
-  **INTER FACE** Analog (U/I) / RS422 / PROFINET / EtherNet/IP / EtherCAT
-  **ASc** Advanced Surface Compensation
-  Repeatability $<0.1 \mu\text{m}$
-  Ideal for series and OEM applications
-  Highest immunity to ambient light
-  High resistance to shocks and vibrations



Next-generation laser sensors

The optoNCDT 1900 laser sensors are used for dynamic displacement, distance and position measurements and offer a unique combination of performance, design and integration capability. The integrated high-performance controller enables fast and highly precise processing and output of measurement values.

These innovative sensors are used whenever maximum precision is combined with the latest technology, e.g., in sophisticated automation, automotive production, 3D printing and coordinate measuring machines.

Advanced Surface Compensation – The intelligent exposure control for demanding surfaces

The optoNCDT 1900 laser sensors are equipped with an intelligent surface control feature. Innovative algorithms enable stable measurement results even on demanding surfaces where changing reflections occur. Furthermore, these new algorithms compensate for ambient light up to 50,000 lux. Therefore, these are the sensors with the highest resistance to ambient light in their class and can even be used in strongly illuminated environments.



Advanced Surface Compensation
With rapidly changing surfaces, the exposure control enables reliable measurement results.

Industrial Ethernet for easy integration

The latest optoNCDT 1900 laser triangulation sensors are also available with integrated Industrial Ethernet interface. Depending on the model, you can integrate the full sensor performance into your PLC directly via EtherCAT, EtherNet/IP or PROFINET without any additional interface module. You benefit from real-time data without time delay as well as reduced installation and wiring effort.



The sensor parameters can be set directly via Industrial Ethernet or still via web interface. For high speed measurements, the sensor offers an Oversampling feature which allows, depending on the fieldbus, measurement data to be detected or transmitted eight times faster than the bus cycles.

EtherCAT®

EtherNet/IP®

PROFI
NET®


Model	Technology	Measuring range	Repeatability	Linearity
optoNCDT 1900		2 - 500 mm	0.1 μm	from 0.02 %
optoNCDT 1900LL		2 - 50 mm	0.1 μm	from 0.02 %

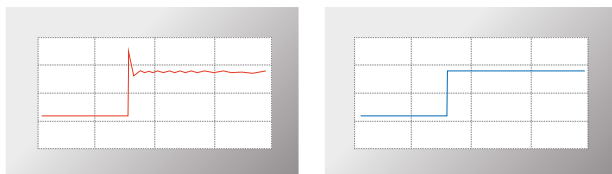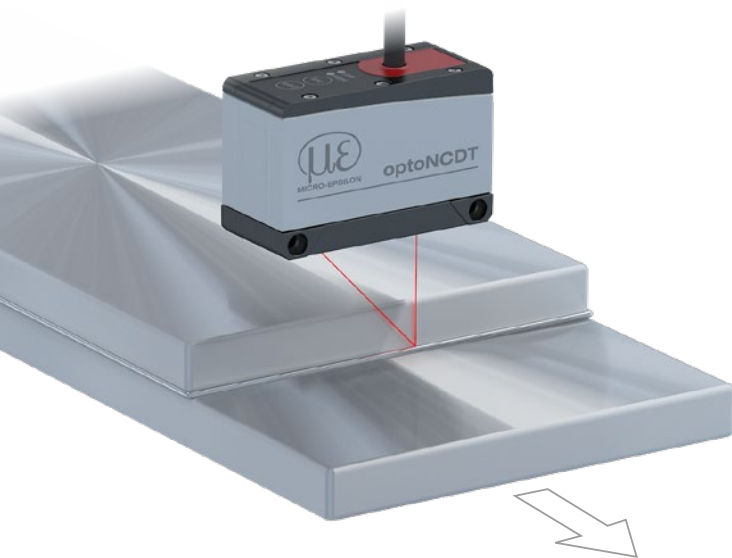

The two-step measurement value averaging enables smooth signal courses when measuring edges (right). Otherwise, interfering signals occur (left).

Highest stability based on intelligent signal optimization

For the first time, a two-step measurement value averaging feature is available to optimize the signal. This enables a smooth signal at edges and steps. Especially for high speed measurements of moving parts, measurement averaging enables a precise signal course.

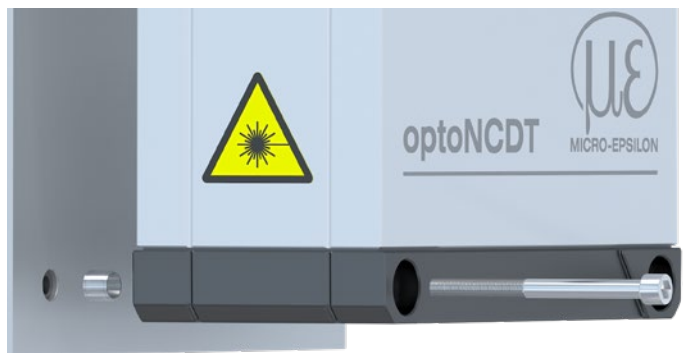


Patented installation

Easy mounting and high repeatability when replacing the sensor


Simple mounting and initial operation

Mounting the sensor using fitting sleeves automatically aligns the sensor in the correct position. This enables both easy sensor replacement and even higher precision in solving measurement tasks. Thanks to its small dimensions, the laser sensor can also be integrated in confined spaces.


Application examples

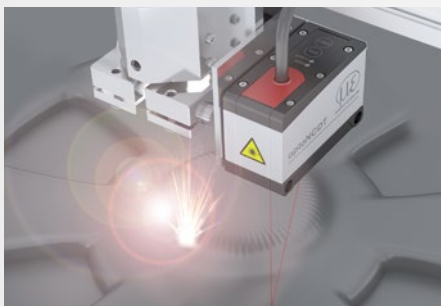

Distance measurement of print heads

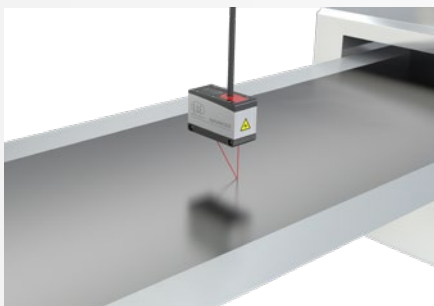

Thickness measurement of electrode film

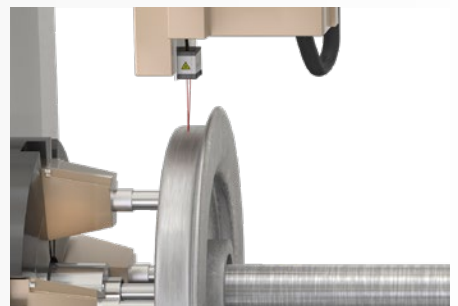

Wear inspection of wheel tires



Laser-Line - optoNCDT 1900LL

Model		ILD1900-2LL	ILD1900-6LL	ILD1900-10LL	ILD1900-25LL	ILD1900-50LL
Measuring range		2 mm	6 mm	10 mm	25 mm	50 mm
Start of measuring range		15 mm	17 mm	20 mm	25 mm	40 mm
Mid of measuring range		16 mm	20 mm	25 mm	37.5 mm	65 mm
End of measuring range		17 mm	23 mm	30 mm	50 mm	90 mm
Linearity ^[1]		< ±1 µm	< ±1.2 µm	< ±2 µm	< ±5 µm	< ±10 µm
		< ±0.05 % FSO	< ±0.02 % FSO	< ±0.02 % FSO	< ±0.02 % FSO	< ±0.02 % FSO
Repeatability ^[2]		< 0.1 µm	< 0.25 µm	< 0.4 µm	< 0.8 µm	< 1.6 µm
Light spot diameter ^[3]	SMR	55 x 480 µm	100 x 600 µm	125 x 730 µm	210 x 950 µm	235 µm x 1280 µm
	MMR	40 x 460 µm	50 x 565 µm	55 x 690 µm	80 x 970 µm	125 µm x 1500 µm
	EMR	55 x 440 µm	100 x 525 µm	125 x 660 µm	220 x 1000 µm	325 µm x 1740 µm
	smallest Ø	40 x 460 µm with 16 mm	50 x 565 µm with 20 mm	55 x 690 µm with 25 mm	80 x 970 µm with 37.5 mm	115 x 1450 µm with 59 mm
Permissible ambient light		50,000 lx				

^[1] Related to digital output; FSO = Full Scale Output



The specified data apply to white, diffuse reflecting surfaces (Micro-Epsilon reference ceramic for ILD sensors)

^[2] Typical value with measurements at 4 kHz and median 9

^[3] ±10 %; SMR = Start of measuring range; MMR = Mid of measuring range; EMR = End of measuring range
Light spot diameter with line-shaped laser determined based on the emulated 90/10 knife-edge method

Dimensions

optoNCDT 1900

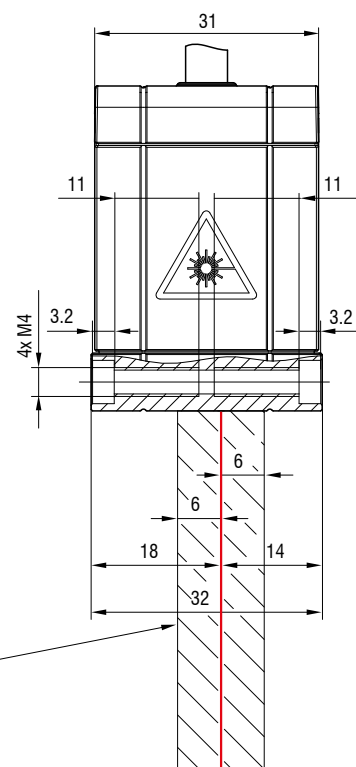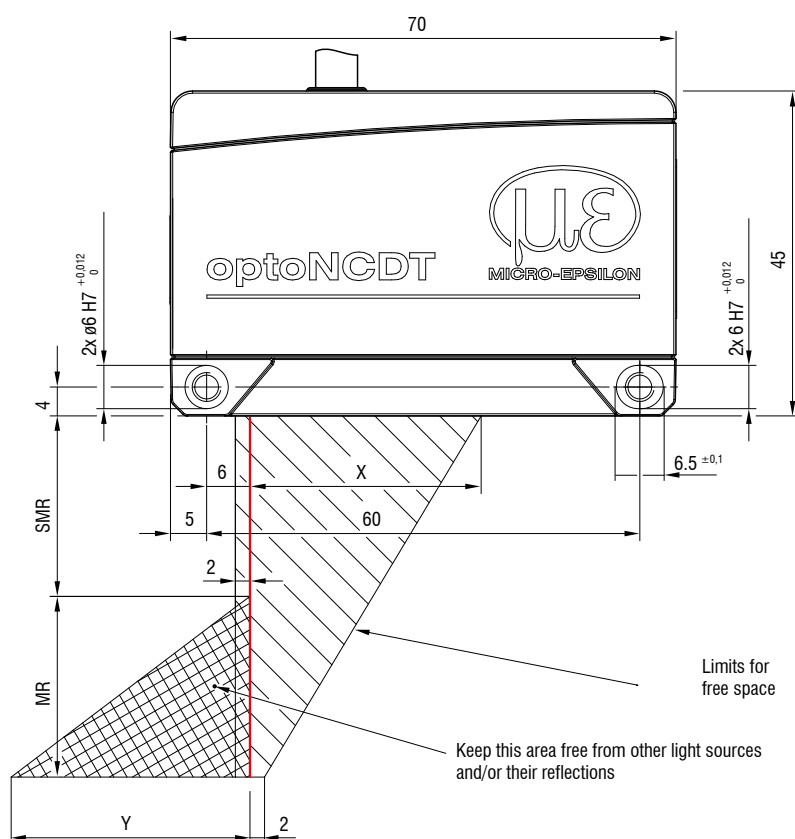


MR	SMR	X	Y
2	15	23	3
6	17	27	9
10	20	33	14
25	25	33	33
50	40	36	45
100	50	37	75
200	60	39	130
500	100	43	215

(Dimensions in mm, not to scale)



MR = measuring range; SMR = start of measuring range

MMR = mid of measuring range; EMR = end of measuring range

Connector (sensor side)

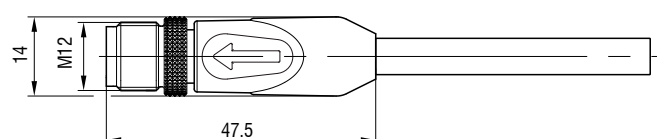

Installation options

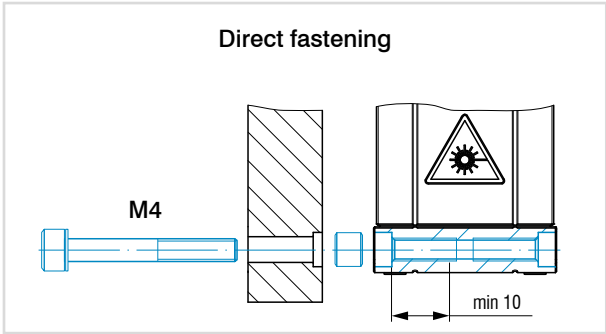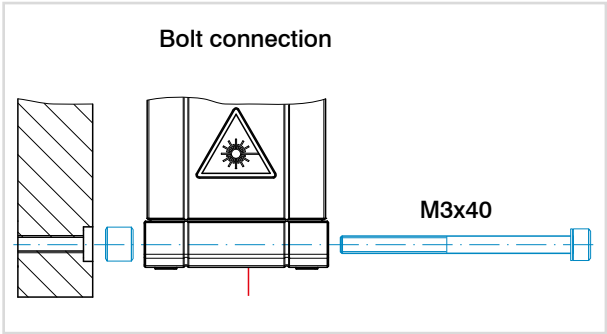

Accessories for optoNCDT 1900/1910

Power supply unit

PS2020 (power supply 24 V / 2.5 A, input 100 - 240 VAC, output 24 VDC / 2.5 A, mounting onto symmetrical standard rail 35 mm x 7.5 mm, DIN 50022)

Protective film

Transparent protective film 52 x 15 mm for ILD1900

Protective housings

with air purge and cooling, see page 60

Scope of supply

- 1 Sensor ILD1900/1910
- 1 Assembly instructions
- 1 Calibration protocol
- Accessories (2 pc. centering sleeves, 2 pc. M3 x 40)

Article designation

ILD1900-	6	LL	CL3B	EtherCAT
				Interface No indication: RS422, current, voltage (standard) integrated fieldbus: EtherCAT, EtherNet/IP, PROFINET
				Laser class No indication: class 2 (standard) 3B: on request 3R: on request
				Laser type No indication: Red laser point (standard) LL: Laser Line
				Measuring range in mm
Series ILD1900: Laser displacement sensor for Advanced Automation				

Connection possibilities

optoNCDT 1900

Connection possibilities for sensors with integrated cables

Cable diameter:	5.80 ±0.2 mm
Drag chain:	yes
Robot:	no
Temperature range:	-25 ... 80 °C (moving) -40 ... 80 °C (not moving)
Bending radius:	> 30 mm (fixed installation) > 75 mm (dynamic)

Sensor	Cables	Type	Connection possibilities and accessories
LD1900-xx ILD1900-xxLL ILD1910-xx	Integrated cable length 3 m	Open ends	Supply voltage connection Power supply unit PS2020  Interface module of RS422 to USB IF2001/USB IC2001/USB  Interface module for Industrial Ethernet connection IF2035-PROFINET IF2035-EIP IF2035-EtherCAT 

Drag-chain suitable connection cables for sensors with pigtail

Cable diameter:	6.7 ±0.2 mm
Drag chain:	yes
Robot:	no
Temperature range:	-25 ... 80 °C (moving) (up to +105 °C for max. 3000 hrs) -40 ... 80 °C (not moving)
Bending radius:	> 34 mm (fixed installation) > 67 mm (dynamic) > 81 mm (drag chain)

Sensor	Cables	Type	Connection possibilities and accessories											
ILD1900-xx ILD1900-xxLL ILD1910-xx	Extension cable pigtail Length 3 m / 6 m / 9 m / 15 m <table><tr><td>Art. no.</td><td>Designation</td></tr><tr><td>29011218</td><td>PC1900-3/OE</td></tr><tr><td>29011219</td><td>PC1900-6/OE</td></tr><tr><td>29011220</td><td>PC1900-9/OE</td></tr><tr><td>29011221</td><td>PC1900-15/OE</td></tr></table>	Art. no.	Designation	29011218	PC1900-3/OE	29011219	PC1900-6/OE	29011220	PC1900-9/OE	29011221	PC1900-15/OE	Open ends	Connection supply voltage PS2020	
	Art. no.	Designation												
	29011218	PC1900-3/OE												
	29011219	PC1900-6/OE												
	29011220	PC1900-9/OE												
	29011221	PC1900-15/OE												
Adapter cable for PC interface card Length 3 m / 6 m / 9 m / 15 m <table><tr><td>Art. no.</td><td>Designation</td></tr><tr><td>29011316</td><td>PC1900-3/IF2008 PCIE</td></tr><tr><td>29011317</td><td>PC1900-6/IF2008 PCIE</td></tr><tr><td>29011318</td><td>PC1900-9/IF2008 PCIE</td></tr><tr><td>29011319</td><td>PC1900-15/IF2008 PCIE</td></tr></table>	Art. no.	Designation	29011316	PC1900-3/IF2008 PCIE	29011317	PC1900-6/IF2008 PCIE	29011318	PC1900-9/IF2008 PCIE	29011319	PC1900-15/IF2008 PCIE	Sub-D	Interface module of RS422 to USB IF2001/USB IC2001/USB		
	Art. no.	Designation												
	29011316	PC1900-3/IF2008 PCIE												
29011317	PC1900-6/IF2008 PCIE													
29011318	PC1900-9/IF2008 PCIE													
29011319	PC1900-15/IF2008 PCIE													
Adapter cable for sensor calculation Length 3 m / 6 m / 9 m / 15 m <table><tr><td>Art. no.</td><td>Designation</td></tr><tr><td>29011320</td><td>PC1900-3/C-Box</td></tr><tr><td>29011321</td><td>PC1900-6/C-Box</td></tr><tr><td>29011322</td><td>PC1900-9/C-Box</td></tr><tr><td>29011323</td><td>PC1900-15/C-Box</td></tr></table>	Art. no.	Designation	29011320	PC1900-3/C-Box	29011321	PC1900-6/C-Box	29011322	PC1900-9/C-Box	29011323	PC1900-15/C-Box	Sub-D	Interface module for Industrial Ethernet connection IF2035-PROFINET IF2035-EIP IF2035-EtherCAT		
	Art. no.	Designation												
	29011320	PC1900-3/C-Box												
29011321	PC1900-6/C-Box													
29011322	PC1900-9/C-Box													
29011323	PC1900-15/C-Box													
Adapter cable for sensor calculation Length 2 m <table><tr><td>Art. no.</td><td>Designation</td></tr><tr><td>29011326</td><td>PCE1900-3/M12</td></tr></table>	Art. no.	Designation	29011326	PCE1900-3/M12	M12	Interface card for synchronous data acquisition IF2008PCie / IF2008E								
	Art. no.	Designation												
29011326	PCE1900-3/M12													
4-fold interface module from RS422 to USB IF2004/USB														
			Controller for D/A conversion and evaluation of up to 2 sensor signals Dual Processing Unit											
			Interface module for Ethernet connection of up to 8 sensors IF2008/ETH											

Robot-suitable connection cables

Cable diameter:	approx. 7.3 mm
Drag chain:	no
Robot:	yes
Temperature range:	-40 ... 90 °C (moving) -50 ... 90 °C (not moving)
Bending radius:	> 37 mm (fixed installation) > 73 mm (dynamic)

Sensor	Cables	Type	Connection possibilities and accessories	
LD1900-xx ILD1900-xxLL ILD1910-xx	Extension cable pigtail Length 3 m / 6 m / 9 m / 15 m <i>Art. no.</i> <i>Designation</i> 29011404 PC1900R-3/OE 29011405 PC1900R-6/OE 29011406 PC1900R-9/OE 29011407 PC1900R-15/OE	Open ends	Connection supply voltage PS2020	
	Interface module of RS422 to USB IF2001/USB IC2001/USB			
	Interface module for Industrial Ethernet connection IF2035-PROFINET IF2035-EIP IF2035-EtherCAT			

Connection cables for sensors with integrated Industrial Ethernet interface

Cable diameter:	7.5 ±0.2 mm
Drag chain:	yes
Robot:	no
Temperature range:	-40 ... 90 °C (moving) -50 ... 90 °C (not moving)
Bending radius:	> 38 mm (fixed installation) > 75 mm (dynamic)

Sensor	Cables	Type	Connection possibilities and accessories											
ILD1900-xx-PROFINET* ILD1900-xxLL-PROFINET* ILD1900-xx-EtherCAT ILD1900-xxLL-EtherCAT ILD1900-xx-EtherNet/IP ILD1900-xxLL-EtherNet/IP	Connection cables PoE, laser On/Off hardware Length 3 m / 6 m / 9 m / 15 m <table><tr><th>Art. no.</th><th>Designation</th></tr><tr><td>29011332</td><td>PC1900-IE-3/OE-RJ45</td></tr><tr><td>29011333</td><td>PC1900-IE-6/OE-RJ45</td></tr><tr><td>29011334</td><td>PC1900-IE-9/OE-RJ45</td></tr><tr><td>29011444</td><td>PC1900-IE-15/OE-RJ45</td></tr></table>	Art. no.	Designation	29011332	PC1900-IE-3/OE-RJ45	29011333	PC1900-IE-6/OE-RJ45	29011334	PC1900-IE-9/OE-RJ45	29011444	PC1900-IE-15/OE-RJ45	Open ends & RJ45	Signal / Supply PoE optional: PoE Switch	
Art. no.	Designation													
29011332	PC1900-IE-3/OE-RJ45													
29011333	PC1900-IE-6/OE-RJ45													
29011334	PC1900-IE-9/OE-RJ45													
29011444	PC1900-IE-15/OE-RJ45													
ILD1900-xx-EtherCAT ILD1900-xxLL-EtherCAT ILD1900-xx-EtherNet/IP ILD1900-xxLL-EtherNet/IP	Connection cables PoE, laser On/Off Software Length 3 m / 6 m / 9 m / 15 m <table><tr><th>Art. no.</th><th>Designation</th></tr><tr><td>29011338</td><td>PC1900-IE-3/RJ45</td></tr><tr><td>29011355</td><td>PC1900-IE-6/RJ45</td></tr><tr><td>29011356</td><td>PC1900-IE-9/RJ45</td></tr><tr><td>29011445</td><td>PC1900-IE-15/RJ45</td></tr></table>	Art. no.	Designation	29011338	PC1900-IE-3/RJ45	29011355	PC1900-IE-6/RJ45	29011356	PC1900-IE-9/RJ45	29011445	PC1900-IE-15/RJ45	RJ45		
Art. no.	Designation													
29011338	PC1900-IE-3/RJ45													
29011355	PC1900-IE-6/RJ45													
29011356	PC1900-IE-9/RJ45													
29011445	PC1900-IE-15/RJ45													

*PoE not possible with PROFINET


Other cables

Cable diameter:	6.7 mm
Drag chain:	yes
Robot:	no
Temperature range:	-40 ... 80 °C
Bending radius:	> 27 mm (fixed installation) > 51 mm (dynamic)

Input	Cables	Type	Connection possibilities and accessories	
2 x Sub-D (PC1900-x/ IF2008 PCIE)	Adapter cable for the connection of two sensors per Sub-D connector Length 0.1 m Art. no. Designation 2901528 IF2008-Y-adapter cable 	Sub-D	Interface card for synchronous data acquisition IF2008PCle / IF2008E 	
			4-fold USB converter & parameter setting IF2004/USB 	

sensorTOOL

The Micro-Epsilon sensorTOOL is a powerful software that is used to operate one or more optoNCDT sensors. The sensorTOOL can be used to access the sensor connected to the PC, display its complete data stream and save it in a file (in Excel-compatible CSV format). The sensor is configured via its web interface.

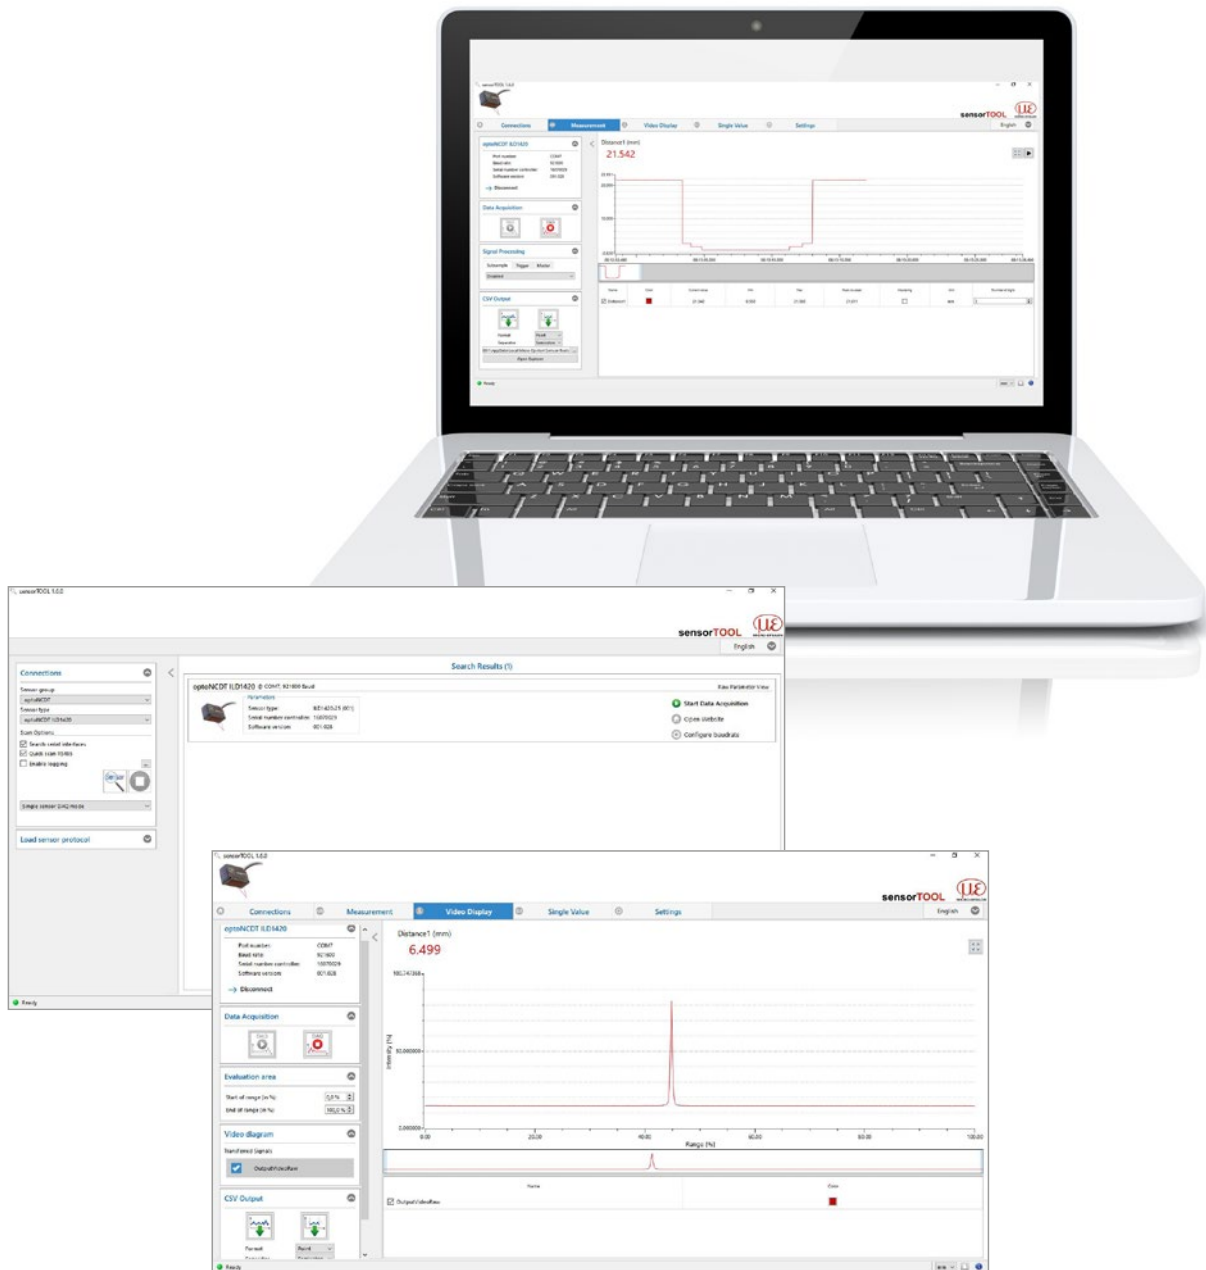

Free download

All software tools, drivers and documented driver DLL for easy integration of the sensors into existing or internally-generated software are available free of charge under www.micro-epsilon.de/download


Sensors and Systems from Micro-Epsilon



Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement

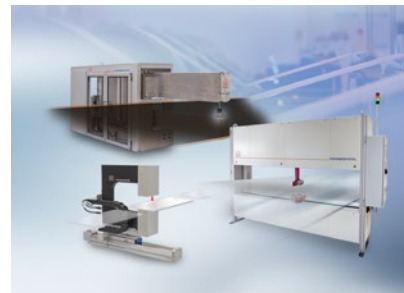


Measuring and inspection systems for metal strips, plastics and rubber



Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers

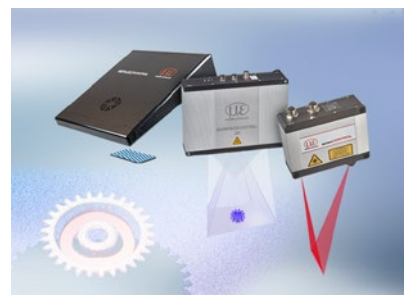

3D measurement technology for dimensional testing and surface inspection